



LT-390

Model	LT-390
Pump Model	LT3WZ-1200A
Max. Pressure (PSI/bar)	1600/112
Flow (GPM / L/min.)	1.9/7.3
Power	1.8KW
RPM	2800
Dimension (cm)	39.5×38.5×39



LT-590

Model	LT-590
Pump Model	
Max. Pressure (PSI/bar)	1900/130
Flow (GPM / L/min.)	2.11/8
Power	2.2KW
RPM	2800



LT-8.7/16M

Model	LT-8.7/16M
Pump Model	LT3WZ-2525A
Max. Pressure (PSI/bar)	2000/140
Flow (GPM / L/min.)	1.9/7.3
Power	2.2KW
RPM	2800
Dimension (cm)	58.5×45.5×40.5

Pressure Washer Series



LT-390



LT-8.7/16M

Standard features

- Performance-approved electric motor
- Motor with aluminium casing
- 8m high-pressure hose
- Quick connect nozzles 0°, 15°, 40° and chemical nozzle
- Pressure adjustable
- Low pressure detergent injector
- Professional trigger gun with safety lock
- In-line water filter

- Electrical wire with plug
- Plastic protection casing

Optionals

- Custom-made motor Voltage and Frequency
- Adjustable chemical injector
- Pressure gauge
- Water in-let hose connector

Model	LT-390	LT-8.7/16M
Pump Model	LT3WZ-1200A	LT3WZ-2525A
Max.Pressure (PSI/bar)	1200/84	2000/140
Flow (gpm/lpm)	1.9/7.3	1.9/7.3
Power	1.6KW	2.2KW
R.P.M.	2800	2800
Dimensions (cm)	58.5x45.5x40.5	58.5x45.5x40.5



LT-8.7/18M

Standard features

- Motor with aluminium casing
- Commercial grade direct drive brass cylinder ceramic plungers radial direction pump
- 8m high-pressure hose
- Quick connect nozzles 0°, 15°, 40° and chemical nozzle
- Pressure adjustable
- Low pressure detergent injector
- Professional trigger gun with safety lock
- 10 inches pneumatic wheels

- In-line water filter
- Convenient hose and gun hook

Optionals

- Custom-made motor Voltage and Frequency
- Thermal relief valve
- Adjustable chemical injector
- Pressure gauge
- Out-returning unloader
- Protection box
- Water in-let hose connector

Model	LT-8.7/18M-1	LT-8.7/18M-2	LT-18/20M-1	LT-18/20M-2	LT-18/20M-3	LT-18/20M-4
Pump Model	LT3WZ-1510A	LT3WZ-1510A	LT3WZ-1810A	LT3WZ-1810A	LT3WZ-1808A	LT3WZ-1810A
Max.Pressure (PSI/bar)	2200/154	2600/182	2400/168	2600/182	2800/196	3400/238
Flow (gpm/lpm)	1.7/6.4	2.1/8.1	2.2/8.3	2.3/8.7	2.8/10.5	3.2/12.1
Power	3.7kW / 4kW	3.7kW / 4kW	5.5kW	7.5kW	5.5kW	7.5kW
R.P.M.	1450	2800	1450	1450	2800	2800
Dimensions (cm)	72.5x54x54	72.5x54x54	88x63x55	88x63x55	88x63x55	88x63x55

Pressure Washer Series



LT-8.7/12E



LT-8.7/12A



LT-8.7/12D



LT-8.7/12C

Standard features

- Performance-approved OHV engine
- Engine with low oil protection
- 8m high-pressure hose
- Quick connect nozzles 0°, 25°, 40° and chemical nozzle
- Low pressure detergent injector
- Professional trigger gun with safety lock
- 10 inches pneumatic wheels

- In-line water filter
- Convenient hose and gun hook
- Thermal relief valve

Optionals

- Adjustable chemical injector
- Water in-let hose connector

Model	LT-8.7/12D	LT-8.7/12A	LT-8.7/12C	LT-8.7/12E
Pump Model	LT3WZ-1200A	LT3WZ-1200A	LT3WZ-1200A	LT3WZ-1200A
Max. Pressure (PSI/bar)	1600/112	2200/154	2200/154	2200/154
Flow (gpm/lpm)	1.6/6.0	2.0/7.5	2.0/7.5	2.0/7.5
Power	2.4HP	5.5HP	5.5HP	5.5HP
R.P.M.	3400	3400	3400	3400
Dimensions (cm)	49.5x39.5x56	59x52x61	82.5x64.5x59	55x55x63


Pressure Washer Series




SPC TRADING COMPANY
www.spc-trading.com



LT-8.7/16C

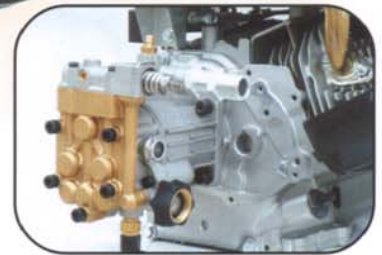

LT-8.7/16C

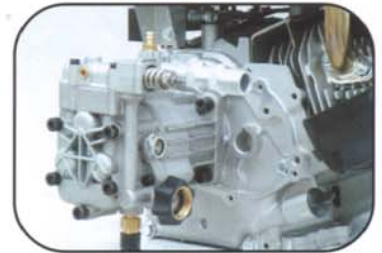

LT-8.7/16D

Standard features

- Performance-approved OHV engine
- Engine with low oil protection
- 8m high-pressure hose
- Quick connect nozzles 0°, 25°, 40° and chemical nozzle
- Low pressure detergent injector
- Professional trigger gun with safety lock
- 10 inches pneumatic wheels

- In-line water filter
- Convenient hose and gun hook
- Thermal relief valve

Optionals

- Adjustable chemical injector
- Water in-let hose connector

Model	LT-8.7/16C	LT-8.7/16D
Pump Model	LT3WZ-1600C	LT3WZ-1600D
Max.Pressure (PSI/bar)	2750/192	2200/154
Flow (gpm/lpm)	2.3/8.7	2.2/8.3
Power	6.0HP	5.5HP
R.P.M.	3400	3400
Dimensions (cm)	55x55x63	55x55x63



LT-8.7/18

Model	LT-8.7/18
Pump Model	LT3WZ-1508A
Max. Pressure (PSI/bar)	2800/196
Flow (GPM / L/min.)	2.2/8.3
Power	7HP
RPM	3400
Dimension (cm)	70×56×56

Model	LT-8.7/22
Pump Model	LT3WZ-1510A
Max. Pressure (PSI/bar)	3000/210
Flow (GPM / L/min.)	2.5/9.5
Power	8HP
RPM	3400
Dimension (cm)	81.5×48.5×62.5



LT-8.7/22



LT-18/24A

Model	LT-18/24A
Pump Model	LT3WZ-1810A
Max. Pressure (PSI/bar)	3600/252
Flow (GPM / L/min.)	3.5/13.2
Power	13HP
RPM	3400
Dimension (cm)	81.5×51.5×65

Gasoline Pressure Washer Series

SPC SPC TRADING COMPANY
www.spc-trading.com



Standard features

- :: Performance-approved OHV engine
- :: Engine with low oil protection
- :: Commercial grade direct drive brass cylinder ceramic plungers radial direction pump
- :: 8m high-pressure hose
- :: Quick connect nozzles 0° ,15° ,25° ,40° and chemical nozzle
- :: Pressure adjustable
- :: Low pressure detergent injector
- :: Professional trigger gun with safety lock
- :: 10-inch pneumatic wheels
- :: In-line water filter
- :: Convenient hose and gun hook

Optional

- :: Thermal relief valve
- :: Adjustable chemical injector
- :: Pressure gauge
- :: Out-returning unloader
- :: Water inlet hose connector



LT-8.7/18
LT-8.7/22



LT-18/24A


Axial Pump Series



Engine and Motor direct Drive



LT3WZ-2525A

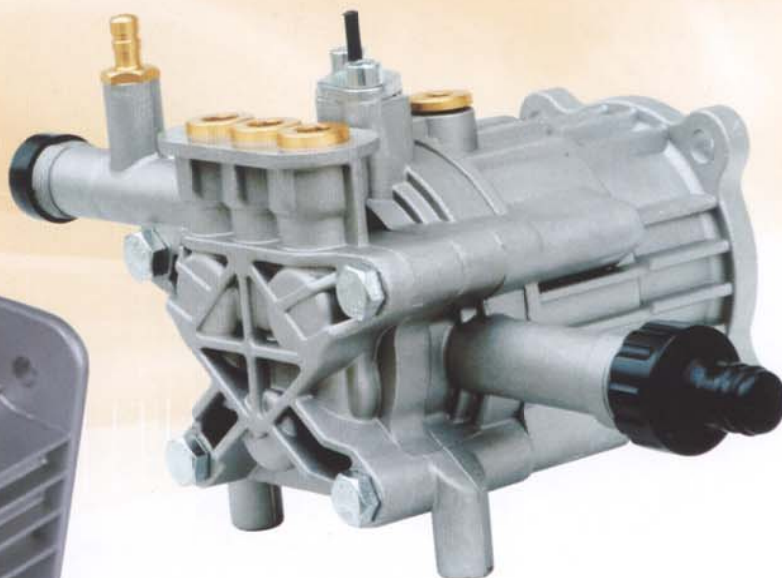

LT3WZ-1200A

Pump features

- Engine and motor direct drive
- Hollow shaft
- Anodized crankcase
- Stainless steel plungers
- Fixed rate chemical injector

- Built-in self suction unloader
- In-line water inlet filter
- Thermal relief valve

Optionals


- Water in-let hose connector

Model		LT3WZ-1200A	LT3WZ-2525A
Bore	(mm)	Ø12	Ø14
Stroke	(mm)	7.7	8
Max.Pressure	(PSI/bar)	2200/154	2500/175
Flow	(gpm/lpm)	2.0/7.5	2.2/8.3
Power		5.5HP	6.5HP
R.P.M.		3400	3400
Dimensions	(cm)	30x19x20	28x24x24

Radial Direction Pump Series



Engine and Motor direct Drive

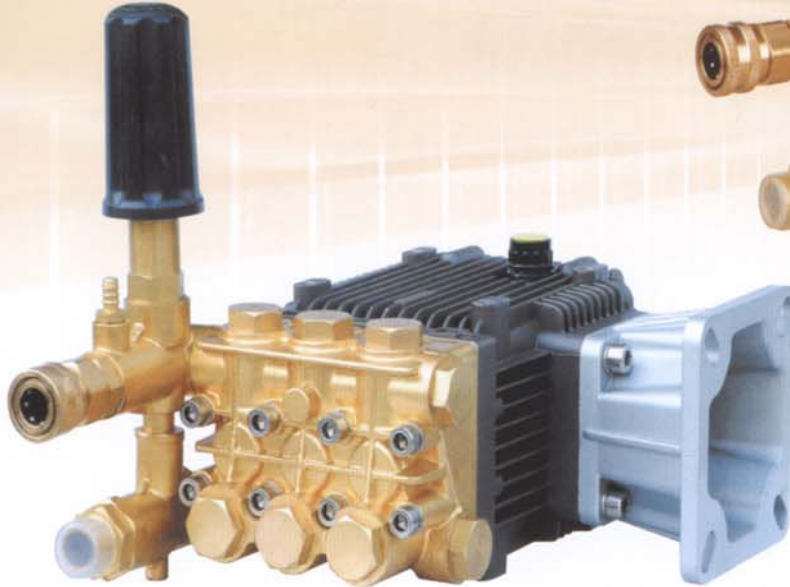

LT3WZ-1810A



LT3WZ-1810B

Pump features

- Engine and motor direct drive
- Forged brass cylinder
- Anodized crankcase
- Ceramic plungers
- German Parker water seal
- Fixed rate chemical injector
- Built-in self suction unloader
- Pressure adjustable
- In-line water inlet filter

- Quick connect out-let

Optionals


- Over-pressurize prevention jam nut
- Thermal relief valve
- Adjustable chemical injector
- Pressure ganuge
- Out-returning unloader
- Water in-let hose connector

Model		LT3WZ-1808A	LT3WZ-1810A	LT3WZ-1810B
Bore	(mm)	Ø18	Ø18	Ø18
Stroke	(mm)	8	10	10
Max.Pressure	(PSI/bar)	2800/196	3600/252	3400/238
Flow	(gpm/lpm)	2.8/10.5	3.5/13.2	3.2/12.1
Power		5.5kW	13HP	7.5kW
R.P.M.		2800	3400	2800
Dimensions	(cm)	38x30x27.5	38x30x27.5	38x30x27.5

Radial Direction Pump Series



Engine and Motor direct Drive

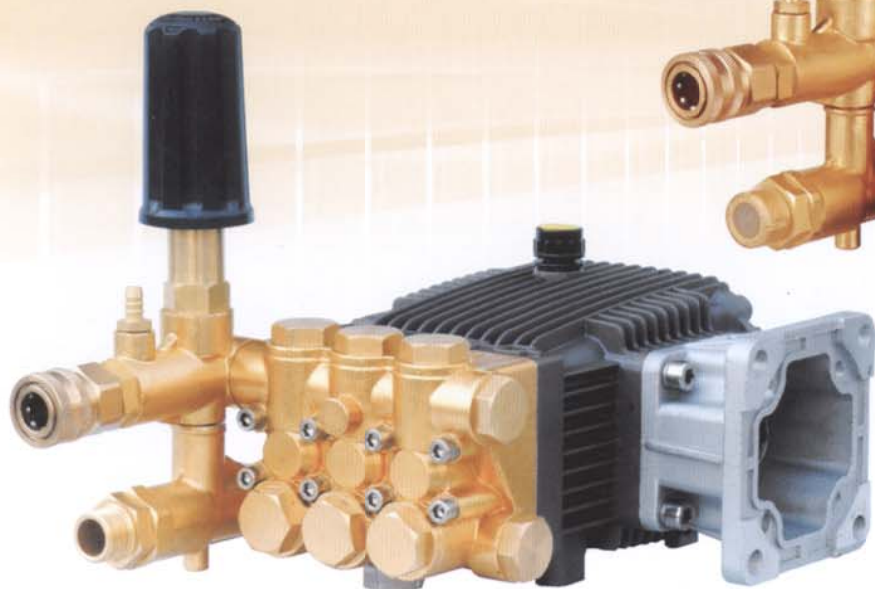

LT3WZ-1510A



LT3WZ-1510B

Pump features

- Engine and motor direct drive
- Forged brass cylinder
- Anodized crankcase
- Ceramic plungers
- German Parker water seal
- Fixed rate chemical injector
- Built-in self suction unloader
- Pressure adjustable
- In-line water inlet filter

- Quick connect out-let

Optionals

- Over-pressurize prevention jam nut
- Thermal relief valve
- Adjustable chemical injector
- Pressure ganuge
- Out-returning unloader
- Water in-let hose connector

Model		LT3WZ-1508A	LT3WZ-1510A	LT3WZ-1510B
Bore	(mm)	Ø14	Ø14	Ø14
Stroke	(mm)	8	10	10
Max.Pressure	(PSI/bar)	2800/196	3000/210	2600/182
Flow	(gpm/lpm)	2.2/8.3	2.5/9.5	2.1/8.1
Power		6.5HP	8HP	3.7kW / 4kW
R.P.M.		3400	3400	2800
Dimensions	(cm)	36x28x25	36x28x25	36x28x25