

FEKABOX 110

AUTOMATIC PUMPING STATION FOR 1 PUMP



TECHNICAL DATA

Operating range:




from 1 to 24 m³/h with a head of up to 9 mt.

Liquid temperature range: + 45° C

Pumped liquid: sewage and household waste.

Installation: Inside a building, laid on the floor.

Not suitable for vehicles and not walkable.



APPLICATIONS

Pump station useful for the collection and transport in sewer of domestic waste water (sewage, rainwater and gray water), from basements or garages of one or more housing units, when the drainage system can not be achieved by gravity.

CONSTRUCTIVE CHARACTERISTICS

CAPACITY: 110 lt

MATERIAL: LLDPE

CONNECTIONS:

- Input DN 50/110
- Ventilation DN 50
- Output G2" orizzontale o verticale


COMPONENTS INCLUDED:

- Pump installation kit complete (see installation pumps image)
- Cable gland for single pump
- Connection 2" F x 1 x 1/4 M for FEKA 600

COMPONENTS EXCLUDED:


- Pump: to be selected according to the configuration possibilities

PUMP INSTALLATION

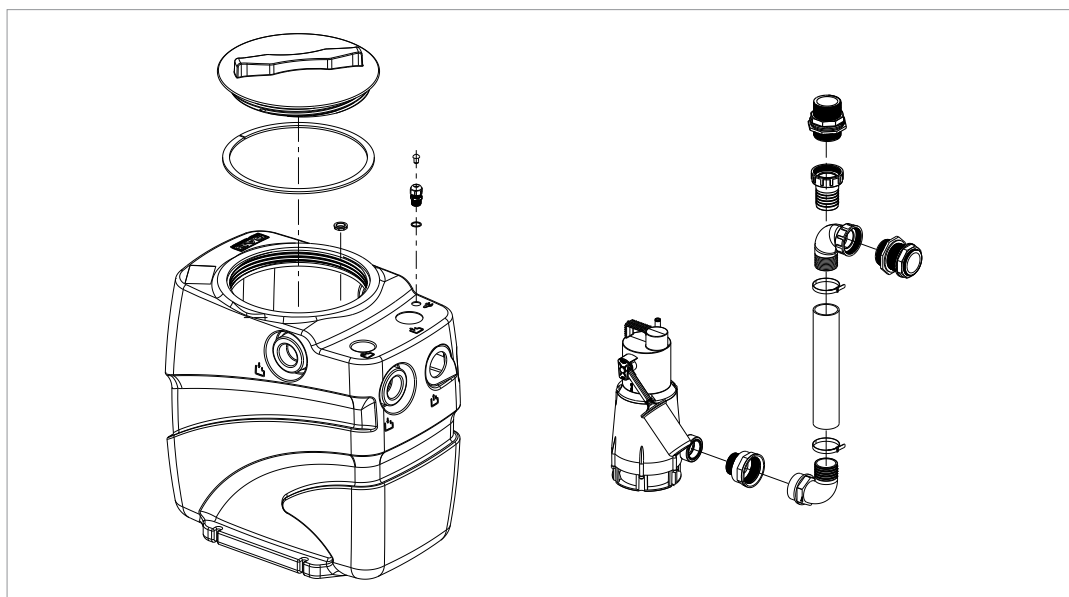

FEKABOX 110 - WASTE WATER COLLECTION AND LIFTING


Liquid temperature range: +50 °C

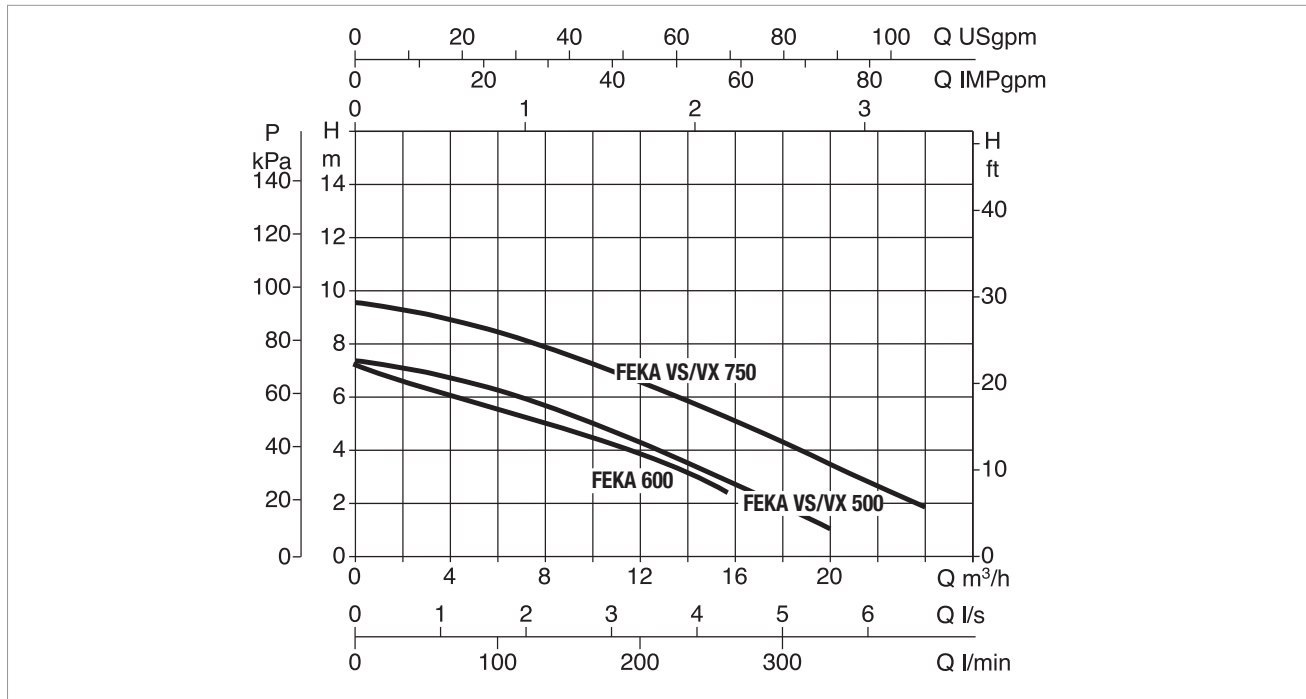

Performance curves are based on kinematic viscosity values = 1 mm²/s and density of 1000 Kg/m³. Curve tolerance in accordance with ISO 9906.

CONFIGURATION

PUMP MODEL	ELECTRICAL DATA				
	VOLTAGE 50 HZ	P1 MAX kW	P2 NOMINAL		In A
			kW	HP	
FEKA 600 M-A	1X220-240 V~	1	0,55	0,75	4,3
FEKA VS/VX 550 M-A	1X220 - 240 V~	0,9	0,55	0,75	4,2
FEKA VS/VX 750 M-A	1X220 - 240 V~	1,1	0,75	1	5,13

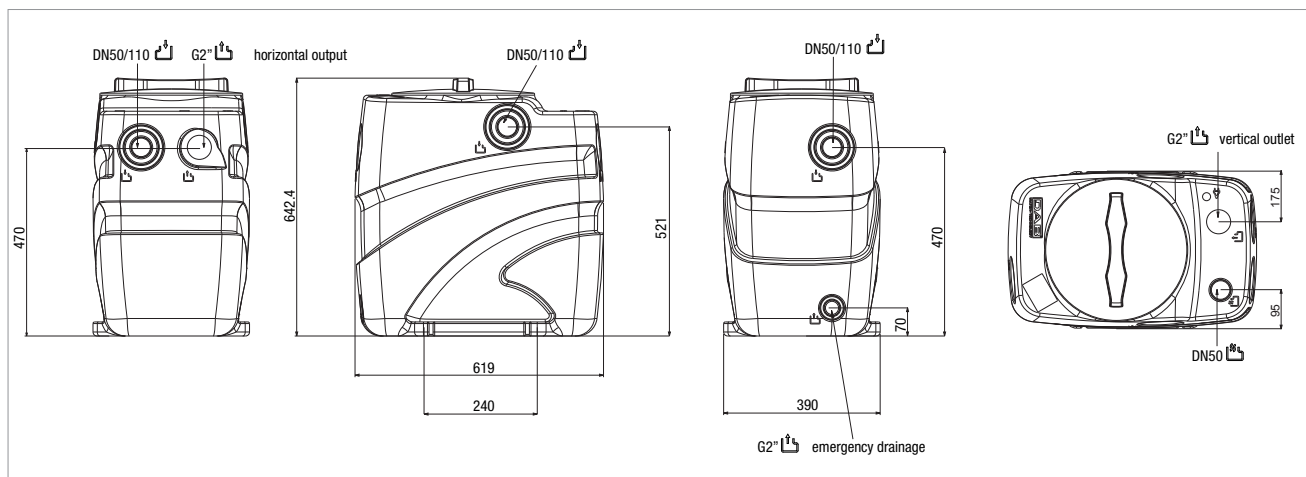

DIMENSIONS AND WEIGHTS

PACKAGING DIMENSIONS			WEIGHT Kg
L/A	L/B	H	
650	400	665	10,3

LEGEND:

- Connection of delivery pipe or emergency outlet
- Collection pipe inlet
- Outlet of power cables and float cables
- Connection of ventilation pipe
- Recyclable material

FEKABOX 200

AUTOMATIC PUMPING STATION FOR 1 PUMP



TECHNICAL DATA


Operating range: from 1 to 24 m³/h with a head of up to 15 mt.

Pumped liquid: ground water, rain water, clear waste water, black waste water and water from rivers and lakes.

Maximum liquid temperature range: 45°C

Installation: Inside or outside the building. Laid on the floor, under the ground or housed.

Not suitable for vehicles but walkable up to 100 Kg.

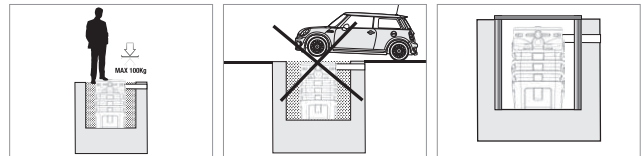

APPLICATIONS

Pump station useful for the collection and transport in sewer of domestic waste water (sewage, rainwater and gray water), from basements or garages of one or more housing units, when the drainage system can not be achieved by gravity.

CONSTRUCTIVE CHARACTERISTICS

CAPACITY: 200 lt

MATERIAL: LLDPE

REGULATIONS: 12050-1

CONNECTIONS:

- Input DN 50/110
- Ventilation DN 50
- Output G2"


COMPONENTS INCLUDED:

- A lifting device 2" PP and anti-rotation bracket for FEKA VS e VX
- Cable gland for single pump
- Connection 2" F x 1 x 1/4 M for FEKA 600
- Floating cable clamp kit FEKA VS e VX

COMPONENTS EXCLUDED:


- Pump: to be selected according to the configuration possibilities
- Floatin alarm support

PUMP INSTALLATION

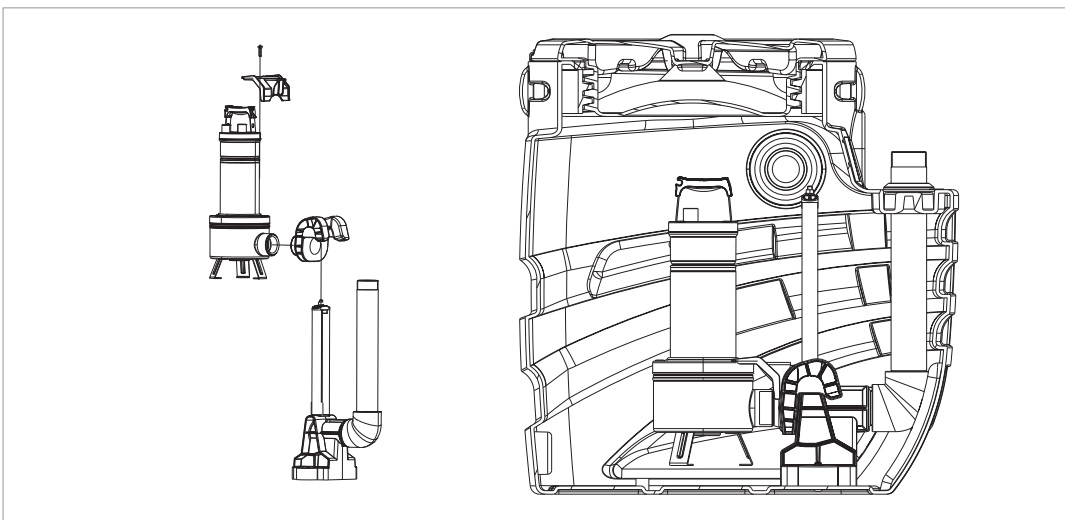

FEKABOX 200 - WASTE WATER COLLECTION AND LIFTING


Maximum liquid temperature range: 45°C

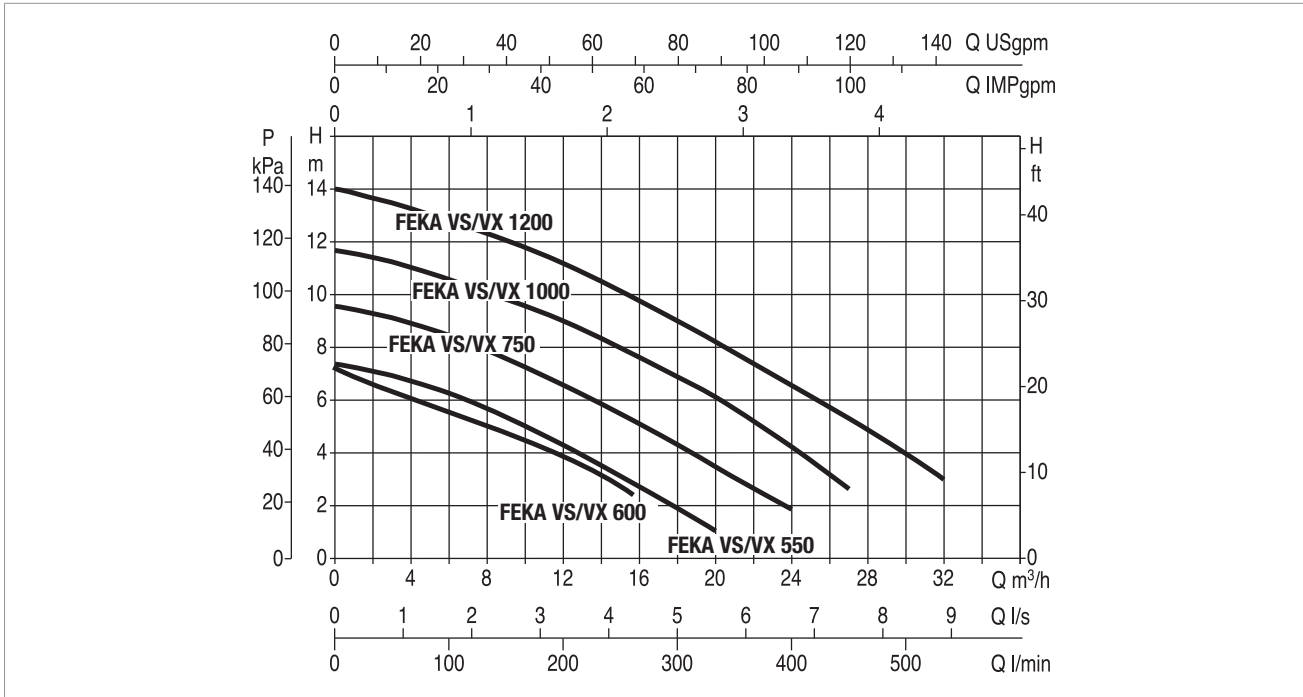

Performance curves are based on kinematic viscosity values = 1 mm²/s and density of 1000 Kg/m³. Curve tolerance in accordance with ISO 9906.

CONFIGURATION

PUMP MODEL	ELECTRICAL DATA				
	VOLTAGE 50 HZ	P1 MAX kW	P2 NOMINAL		In A
			kW	HP	
FEKA 600 M-A	1X220-240 V~	1	0,55	0,75	4,3
FEKA VS/VX 550 M-A	1X220 - 240 V~	0,9	0,55	0,75	4,2
FEKA VS/VX 750 M-A	1X220 - 240 V~	1,1	0,75	1	5,13
FEKA VS/VX 1000 M-A	1X220 - 240 V~	1,4	1	1,36	6,63
FEKA VS/VX 1200 M-A	1X220 - 240 V~	1,9	1,2	1,6	8,63

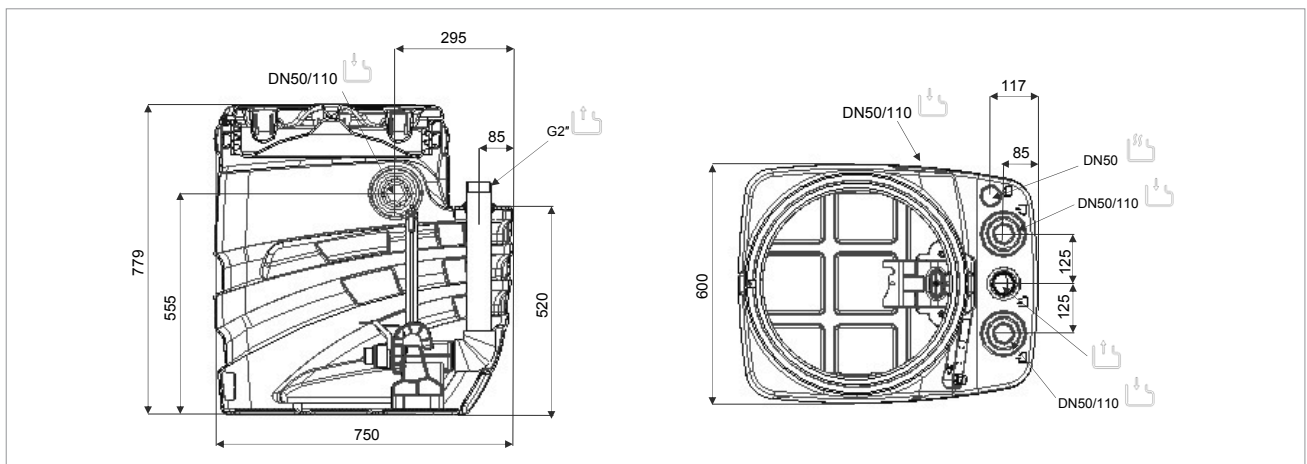

DIMENSIONS AND WEIGHTS

PACKAGING DIMENSIONS			WEIGHT Kg
L/A	L/B	H	
750	600	779	23,2

LEGEND:

- Connection of delivery pipe or emergency outlet
- Collection pipe inlet
- Outlet of power cables and float cables
- Connection of ventilation pipe
- Recyclable material